


LSA Disconnection Module 2/10 with PCB Mounting Pins



Part No. 6468202801-FL

Basic Features

- ⇒ For mounting on PCBs
- ⇒ For shielded and unshielded cables
- ⇒ Ready for use of OVP magazines
- ⇒ LSA contacts for wires 0.4 to 0.8mm

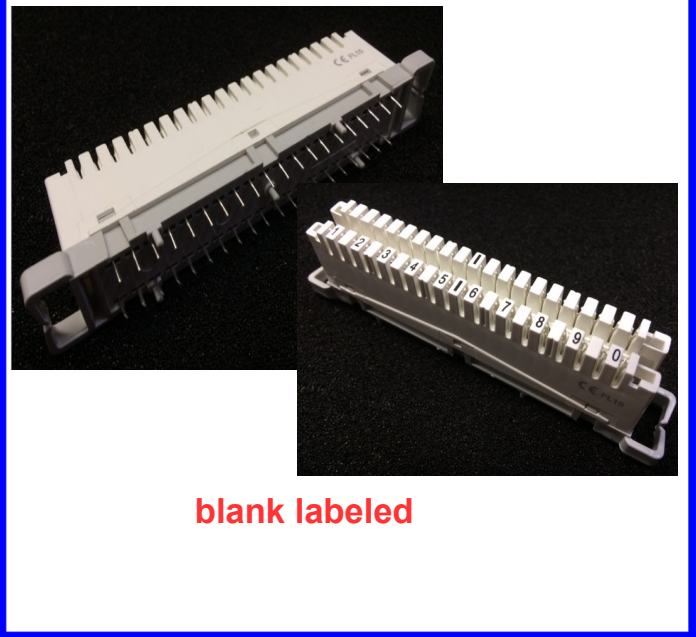

Application Indoor and outdoor telecommunication and industrial networks

Mechanical and Electrical Parameters

Housing Material	PBT
Color	ivory/grey
Flammability	UL 94 V-0
Contact Material	special brass, silver plated $\geq 5\mu\text{m}$ in contact area
Width	129 mm
Height	22 mm
Depth	35 mm
Weight	60 g
Operation Temperature Range	-20 to +80 °C
Storage Temperature Range	-40 to +90 °C
Isolation Resistance	$> 50 \times 10^3 \text{ M}\Omega$
Contact Resistance	$< 1 \text{ m}\Omega$
Dielectric Strength	2 kV rms
Impulse Current	5 kA (8/20 μs)

Ordering Data	Order No.	Description	Pack
	6468202801-FL	LSA disconnection module 2/10 with pins for PCB mounting	10 pieces