


Pigtails & Patchcords - LC Type

- ⇒ Low Insertion Loss
- ⇒ High Return Loss
- ⇒ Bend Radius <30mm
- ⇒ Stable Exchangeability
- ⇒ SM / MM50µm / MM62,5µm / OM3
- ⇒ Different Cable Types
 - 0,9mm Tube
 - 2,0mm Cable
 - 3,0mm Cable
- ⇒ Simplex and Duplex Version
- ⇒ Including Test Protocol

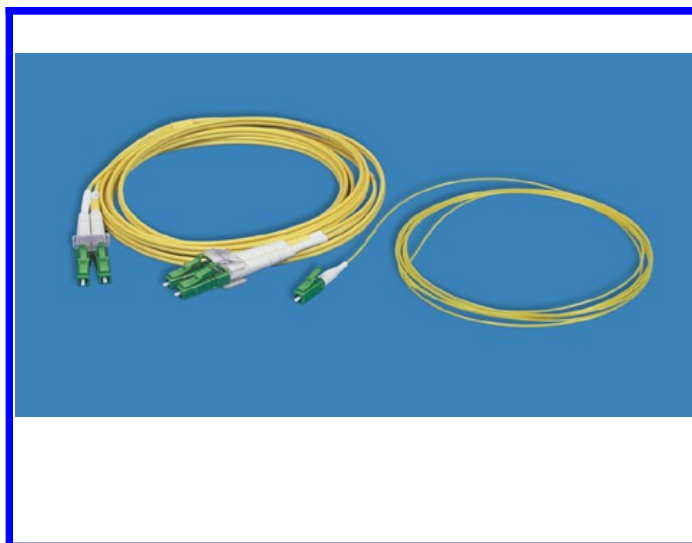

Applications Fiber Optic Networks, Cable TV
WAN, MAN, LAN, FTTX

Standards IEC874-14, CECC86265-801/802
IEC60874-14-1, EN50173
ANSI/TIA/EIA-568-B, IEC60874-19
ITU-T G.657-A-B [OPTIONALLY]

Technical Specification

	SM			MM
	Insertion Loss	< 0,3 dB		
Return Loss	PC > 45 dB	UPC > 50 dB	APC > 60 dB	~
Exchangeability	< 0,2 dB			
Repeatability (500 matings)	< 0,2 dB			
Operating Temperature Range	-20 to +70 °C			
Storage Temperature Range	-40 to +70 °C			
Tensile Strength	> 100 N			

Ordering Data	Order No.	Description	pc/pack.
	LCP3XXX102	Pigtail LC/PC, SM, 0.9mm, 2m	1
	LCU3XXX102	Pigtail LC/UPC, SM, 0.9mm, 2m	1
	LCA3XXX102	Pigtail LC/APC, SM, 0.9mm, 2m	1
	LCM3XXX102	Pigtail LC/PC, MM50µm, 0.9mm, 2m	1
	LCN3XXX102	Pigtail LC/PC, MM62.5µm, 0.9mm, 2m	1
	LCO3XXX102	Pigtail LC/PC, MM50µm-OM3, 0.9mm, 2m	1
	LCP3LCP202	Patchcord LC/PC-LC/PC, SM, Simplex, 2.0mm, 2m	1
	LCU3LCU202	Patchcord LC/UPC-LC/UPC, SM, Simplex, 2.0mm, 2m	1
	LCA3LCA202	Patchcord LC/APC-LC/APC, SM, Simplex, 2.0mm, 2m	1
	LCM3LCM202	Patchcord LC/PC-LC/PC, MM50µm, Simplex, 2.0mm, 2m	1
	LCN3LCN202	Patchcord LC/PC-LC/PC, MM62.5µm, Simplex, 2.0mm, 2m	1
	LCO3LCO202	Patchcord LC/PC-LC/PC, MM50µm-OM3, Simplex, 2.0mm, 2m	1
	LCP4LCP202	Patchcord LC/PC-LC/PC, SM, Duplex, 2.0mm, 2m	1
	LCU4LCU202	Patchcord LC/UPC-LC/UPC, SM, Duplex, 2.0mm, 2m	1
	LCA4LCA202	Patchcord LC/APC-LC/APC, SM, Duplex, 2.0mm, 2m	1
	LCM4LCM202	Patchcord LC/PC-LC/PC, MM50µm, Duplex, 2.0mm, 2m	1
	LCN4LCN202	Patchcord LC/PC-LC/PC, MM62.5µm, Duplex, 2.0mm, 2m	1
	LCO4LCO202	Patchcord LC/PC-LC/PC, MM50µm-OM3, Duplex, 2.0mm, 2m	1