


LSA Disconnection Module 2/10 with Two Screw Terminals



Part No. 7004200201-FL

Basic Features

- ➔ For mounting on back mount frames
- ➔ For shielded and unshielded cables
- ➔ Ready for use of OVP magazines
- ➔ LSA contacts for wires 0.4 to 0.8mm
- ➔ Two screw terminals for wires up to 2.5mm
- ➔ Screw terminals on jumper side and cable side

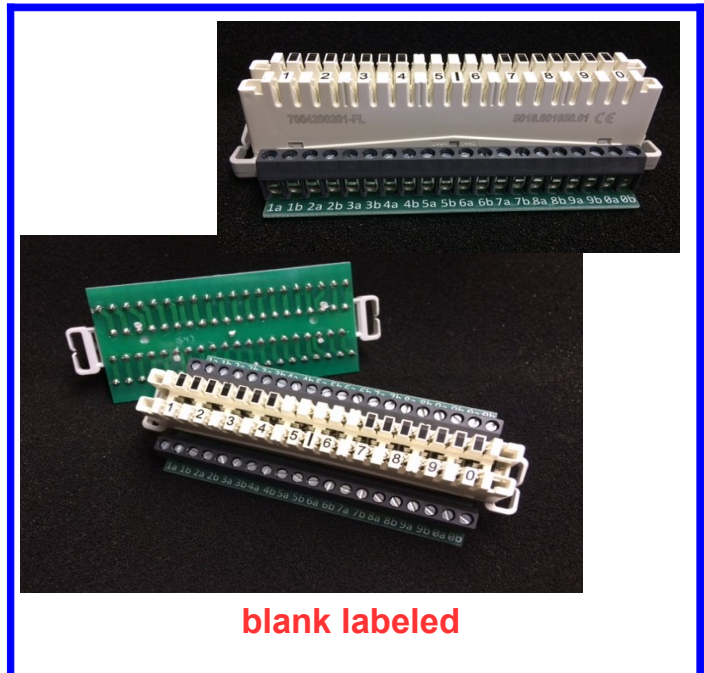

Application Indoor and outdoor telecommunication and industrial networks

Mechanical and Electrical Parameters

Housing Material	PBT
Color	Ivory-grey/black
Flammability	UL 94 V-0
Contact Material	special brass, silver plated $\geq 5\mu\text{m}$ in contact area
Width	129 mm
Height	49 mm
Depth	36 mm
Weight	140 g
Operation Temperature Range	-20 to +80 °C
Storage Temperature Range	-40 to +90 °C
Isolation Resistance	$> 50 \times 10^3 \text{ M}\Omega$
Contact Resistance	$< 1 \text{ m}\Omega$
Dielectric Strength	2 kV rms
Impulse Current	5 kA (8/20 μs)

Ordering Data	Order No.	Description	Pack
	7004 2 002-FL	LSA disconnection module 2/10 with screw terminals on jumper side and cable side	5 pieces