


Multi Wire Connector – 10 Pairs



Part No. MWC-10xx-FL

Basic Features

- For splicing or tapping of up to 10 pairs
- Dry and pre-sealed version available
- Suitable for standard TE tool
- IDC contacts for wires of 0.4 to 0.9mm
- With integrated strain relief

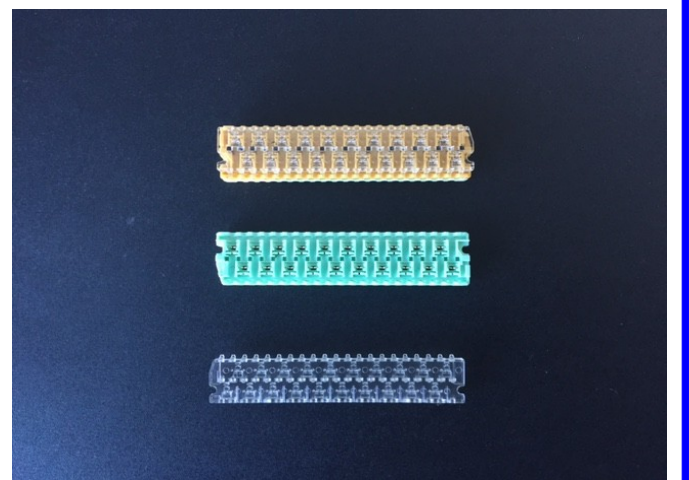

blank labeled

Application For termination of telecommunication cables of copper or aluminum

Mechanical and Electrical Parameters

Housing Material	PC
Color – Splicing Type	transparent/ivory-gold
Color – Half-Tap Type	transparent/ivory-green
Contact Material	special brass, tin plated
Cut-off Blade Material	stainless steel
Width	71.5 mm
Height	15.9 mm
Depth	10.8 mm
Weight – Dry Type / Pre-Sealed Type	ca.10 g / ca.15 g
Operation Temperature Range	-20 to +80 °C
Storage Temperature Range	-40 to +90 °C
Isolation Resistance	> 50 x 10 ⁹ MΩ
Contact Resistance	< 1 mΩ

Ordering Data	Order No.	Description	Pcs / box
	MWC-1011-FL	Multi Wire Connector for 10 pairs, dry/splicing type	50 pieces
	MWC-1012-FL	Multi Wire Connector for 10 pairs, dry/half-tap type	50 pieces
	MWC-1021-FL	Multi Wire Connector for 10 pairs, pre-sealed/splicing type	50 pieces
	MWC-1022-FL	Multi Wire Connector for 10 pairs, pre-sealed/half-tap type	50 pieces