


## Adapter - LC Type

- ⇒ Low Insertion Loss
- ⇒ Stable Exchangeability and Repeatability
- ⇒ For SM and MM Applications
- ⇒ With 1.25mm Ceramic or PB Sleeve
- ⇒ Simplex and Duplex Version
- ⇒ Optionally with Metal Clip

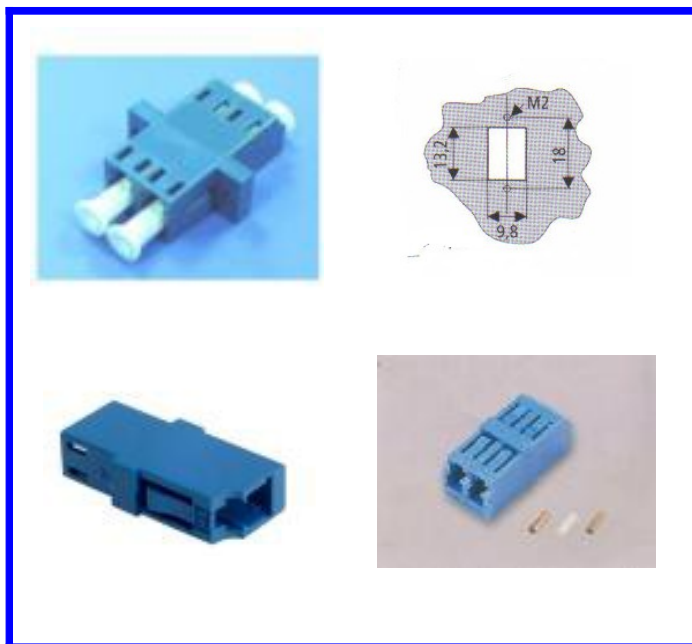

**Applications** Fiber Optic Networks, Cable TV  
WAN, MAN, LAN, FTTX

**Standards** IEC874-14, CECC86265-801/802  
IEC60874-14-1, EN50173  
ANSI/TIA/EIA-568-B, IEC60874-19

## Technical Specification

	SM		MM
	<b>Sleeve Type</b>	Ceramic	
<b>Color</b>	PC - Blue	APC - Green	Beige
<b>Exchangeability</b>	< 0,1 dB		
<b>Repeatability (1000 matings )</b>	< 0,1 dB		
<b>Operating Temperature Range</b>	-40 ~ +85 °C		
<b>Storage Temperature Range</b>	-40 ~ +85 °C		
<b>Material</b>	Plastic		

Ordering Data	Order No.	Description	pc/pack
	ALCP1LCP01	Adapter LC/PC, SM, Simplex, Blue, Ceramic Sleeve	1
	ALCA1LCA01	Adapter LC/APC, SM, Simplex, Green, Ceramic Sleeve	1
	ALCM1LCM01	Adapter LC/PC, MM, Simplex, Beige, PB Sleeve	1
	ALCP2LCP01	Adapter LC/PC, SM, Duplex, Blue, Ceramic Sleeve	1
	ALCA2LCA01	Adapter LC/APC, SM, Duplex, Green, Ceramic Sleeve	1
	ALCM2LCM01	Adapter LC/PC, MM, Duplex, Beige, PB Sleeve	1