


Adapter - SC Type

- ⇒ Low Insertion Loss
- ⇒ Stable Exchangeability and Repeatability
- ⇒ For SM and MM Applications
- ⇒ With 2.5mm Ceramic or PB Sleeve
- ⇒ Simplex and Duplex Version
- ⇒ Optionally with Metal Clip

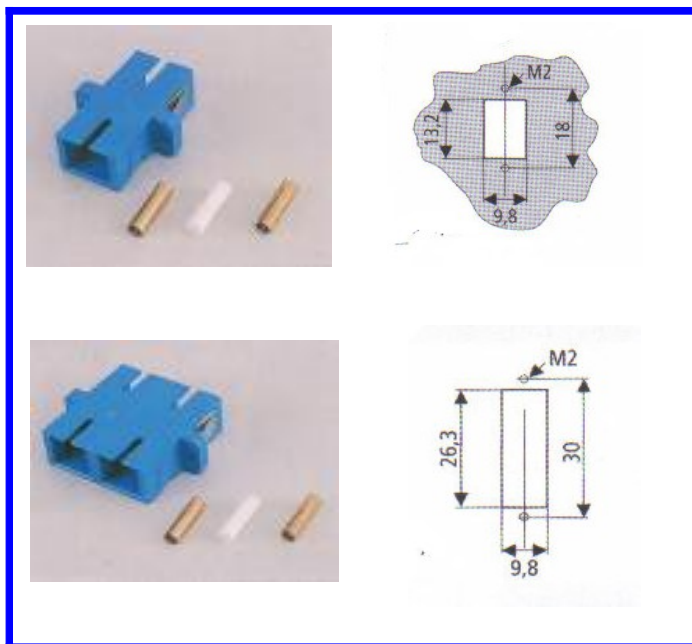

Applications Fibre Optic Networks, Cable TV
WAN, MAN, LAN, FTTX

Standards IEC874-14, CECC86265-801/802
IEC60874-14-1, EN50173
ANSI/TIA/EIA-568-B, IEC60874-19

Technical Specification

	SM		MM
	Sleeve Type	Ceramic	
Color	PC - Blue	APC - Green	Beige
Exchangeability	< 0,1 dB		
Repeatability (1000 matings)	< 0,1 dB		
Operating Temperature Range	-40 ~ +85 °C		
Storage Temperature Range	-40 ~ +85 °C		
Material	Plastic		

Ordering Data	Order No.	Description	pc/pack
	ASCP1SCP01	Adapter SC/PC, SM, Simplex, Blue, Ceramic Sleeve	1
	ASCA1SCA01	Adapter SC/APC, SM, Simplex, Green, Ceramic Sleeve	1
	ASCM1SCM01	Adapter SC/PC, MM, Simplex, Beige, PB Sleeve	1
	ASCP2SCP01	Adapter SC/PC, SM, Duplex, Blue, Ceramic Sleeve	1
	ASCA2SCA01	Adapter SC/APC, SM, Duplex, Green, Ceramic Sleeve	1
	ASCM2SCM01	Adapter SC/PC, MM, Duplex, Beige, PB Sleeve	1