


Pigtails & Patchcords - E2000 Type

- ⇒ Low Insertion Loss
- ⇒ High Return Loss
- ⇒ Bend Radius <30mm
- ⇒ Stable Exchangeability
- ⇒ SM / MM50µm / MM62,5µm / OM3
- ⇒ Different Cable Types
 - 0,9mm Tube
 - 2,0mm Cable
 - 3,0mm Cable
- ⇒ Simplex and Duplex Version
- ⇒ Including Test Protocol

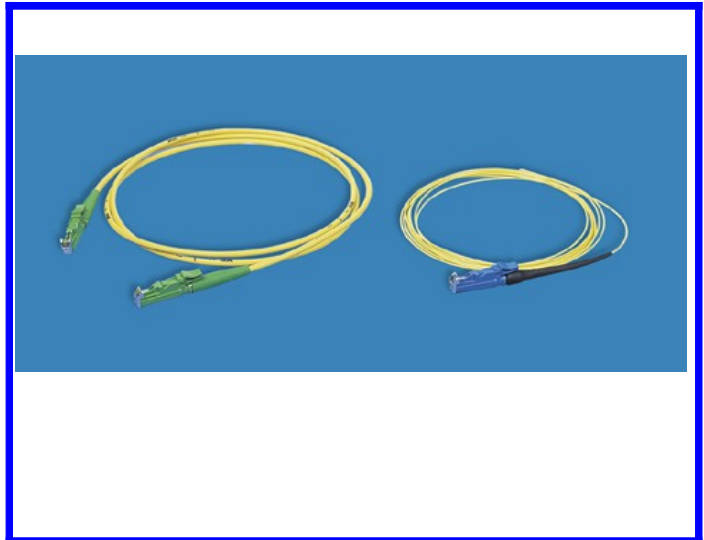

Applications Fiber Optic Networks, Cable TV
WAN, MAN, LAN, FTTX

Standards IEC874-14, CECC86265-801/802
IEC60874-14-1, EN50173
ANSI/TIA/EIA-568-B, IEC60874-19
ITU-T G.657-A-B [OPTIONALLY]

Technical Specification

	SM			MM
	Insertion Loss	< 0,3 dB		
Return Loss	PC > 45 dB	UPC > 50 dB	APC > 60 dB	~
Exchangeability	< 0,2 dB			
Repeatability (500 matings)	< 0,2 dB			
Operating Temperature Range	-20 ~ +70 °C			
Storage Temperature Range	-40 ~ +70 °C			
Tensile Strength	> 100 N			

Ordering Data	Order No.	Description	pc/pack.
	E2P3XXX102	Pigtail E2000/PC, SM, 0.9mm, 2m	1
	E2U3XXX102	Pigtail E2000/UPC, SM, 0.9mm, 2m	1
	E2A3XXX102	Pigtail E2000/APC, SM, 0.9mm, 2m	1
	E2M3XXX102	Pigtail E2000/PC, MM50µm, 0.9mm, 2m	1
	E2N3XXX102	Pigtail E2000/PC, MM62.5µm, 0.9mm, 2m	1
	E2O3XXX102	Pigtail E2000/PC, MM50µm-OM3, 0.9mm, 2m	1
	E2P3E2P202	Patchcord E2000/PC-E2000/PC, SM, Simplex, 2.0mm, 2m	1
	E2U3E2U202	Patchcord E2000/UPC-E2000/UPC, SM, Simplex, 2.0mm, 2m	1
	E2A3E2A202	Patchcord E2000/APC-E2000/APC, SM, Simplex, 2.0mm, 2m	1
	E2M3E2M202	Patchcord E2000/PC-E2000/PC, MM50µm, Simplex, 2.0mm, 2m	1
	E2N3E2N202	Patchcord E2000/PC-E2000/PC, MM62.5µm, Simplex, 2.0mm, 2m	1
	E2O3E2O202	Patchcord E2000/PC-E2000/PC, MM50µm-OM3, Simplex, 2.0mm, 2m	1
	E2P4E2P202	Patchcord E2000/PC-E2000/PC, SM, Duplex, 2.0mm, 2m	1
	E2U4E2U202	Patchcord E2000/UPC-E2000/UPC, SM, Duplex, 2.0mm, 2m	1
	E2A4E2A202	Patchcord E2000/APC-E2000/APC, SM, Duplex, 2.0mm, 2m	1
	E2M4E2M202	Patchcord E2000/PC-E2000/PC, MM50µm, Duplex, 2.0mm, 2m	1
	E2N4E2N202	Patchcord E2000/PC-E2000/PC, MM62.5µm, Duplex, 2.0mm, 2m	1
	E2O4E2O202	Patchcord E2000/PC-E2000/PC, MM50µm-OM3, Duplex, 2.0mm, 2m	1